

CATFORD ENGINEERING PRODUCTS


Phone (08) 8664 1566
Web www.catford.com.au

Fax (08) 8664 1778
Email sales@catford.com.au

200AMP IGBT WELDER WITH ACCESSORIES

MCOW4097 Barcode: 6003751366290

- IGBT insulated gate, bi-polar transistor ensures high duty cycles and greater reliability even in harsh working environments
- Suitable for MMA & Argon TIG Welding
- Uses 1.4mm - 4mm welding rods
- DC Current Output
- Welding Current Range: 20 - 200A
- Input Voltage: 220V
- Input Current: 32 Amp
- Duty Cycle: 60%
- 15 Amp Plug
- Dimensions: 190mm x 120mm x 285mm
- Weight: 4.4kg
- Shoulder strap included
- Supplied with Electrode Holder (with 1.6m Lead), Earth Clamp (with 1.6m Lead), Face Shield, Wire Brush/Chipping Hammer

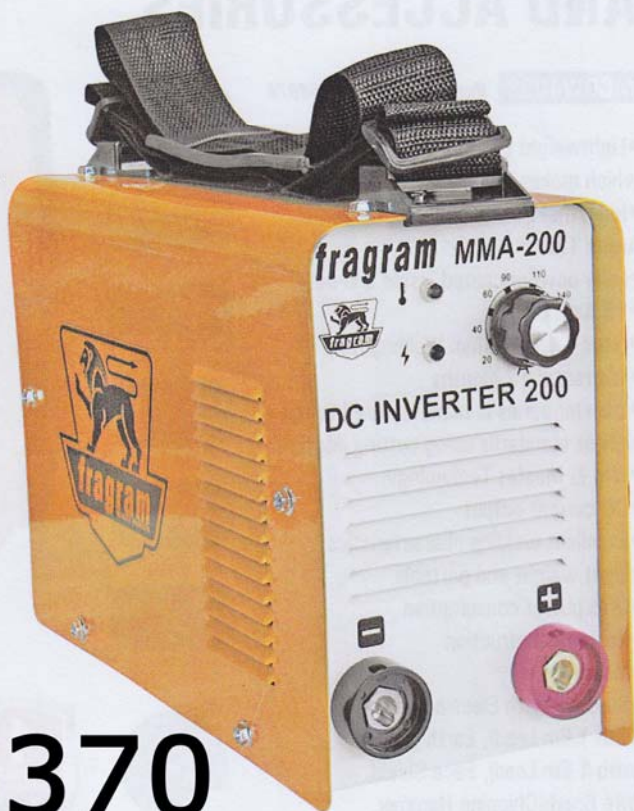

\$370

inc. GST

Included Accessories

SUPPLIED WITH

- ELECTRODE HOLDER (WITH 1.6M LEAD)
- EARTH CLAMP (WITH 1.6M LEAD)
- WIRE BRUSH/CHIPPING HAMMER
- FACE SHIELD



TECHNICAL SPECIFICATIONS	OUTPUT				INPUT			GENERAL			
	A AMPERAGE	V VOLTAGE	DUTY CYCLE	OCV OPEN CIRCUIT VOLTAGE	V VOLTAGE	A AMPERAGE	P GEN	Φ MM MAX ELECTRODE	IP	h W	kg
MMA200 MCOW4097 6003751366290	20-200	27.6	60% @ 200 amps	20	220V +/- 15% 50/60Hz	31.6	7.5kVA	1.4mm 4.0mm	21	I-285 w-120 h-210	4.2

CATFORD ENGINEERING PRODUCTS

Phone (08) 8664 1566 Fax (08) 8664 1778
Web www.catford.com.au Email sales@catford.com.au

\$380

inc. GST

200AMP INVERTER WELDER WITH VRD AND ACCESSORIES

MCOW4098 Barcode: 6003751354976

- Lightweight (6.5kg) and compact which makes this machine very portable
- Industrial quality, suitable for MMA, Argon TIG
- Fully powder coated inside and out
- 15 Amp Plug
- Uses 1.4mm - 4mm Welding Rod
- Warranty: 12 months
- Inverter series is manufactured to the highest standards using cutting edge PWM & Mosfet Technology.
- DC current output
- Excellent welding characteristics
- Light weight and portable
- Less power consumption
- Robust construction
- Industrial
- Supplied with Electrode Holder (with 1.6m Lead), Earth Clamp (with 1.6m Lead), Face Shield, Wire Brush/Chipping Hammer



Included Accessories

- SUPPLIED WITH
- ELECTRODE HOLDER (WITH 1.6M LEAD)
 - EARTH CLAMP (WITH 1.6M LEAD)
 - WIRE BRUSH/CHIPPING HAMMER
 - FACE SHIELD



TECHNICAL SPECIFICATIONS	OUTPUT				INPUT			GENERAL			
	A AMPERAGE	V VOLTAGE	DUTY CYCLE	OCV OPEN CIRCUIT VOLTAGE	V VOLTAGE	A AMPERAGE	P GEN	Φ MIN MAX ELECTRODE	IP	W h HEIGHT	kg
MMA200S MCOW4098 6003751354976	20-200	27.6	60% @ 200 amps	20	220V +- 15% 50/60Hz	31.6	7.5kVA	1.6mm 4.0mm	21	I-370 w-175 h-310	7