

CATFORD ENGINEERING PRODUCTS

Jamestown
SA 5491

All Prices Excluding GST

Phone: 0418 641 566

www.catford.com.au sales@catford.com.au

Sectional Valves

*SN3, SN4, SN6 & SN8

Sectional Valves

*Remote Contol Accessories





Lot 25, Mannanarie Road, Jamestown, South Australia 5491



0418 641 566



sales@catford.com.au

Due to fluctuations in the Australian dollar and the economic climate, please be advised that all prices are subject to change.
Please contact us to confirm pricing.

All prices stated within are exclusive of GST
(All prices are correct as of January 1st 2026, but Catford Engineering reserve the right to change these prices without notice)

Sectional Valves

CATFORD Jamestown
SA 5491
ENGINEERING
PRODUCTS

Phone: 0418 641 566

www.catford.com.au sales@catford.com.au

SECTIONAL VALVES



SN3 Sectional Valve
50 L/min

343



SN4 Sectional Valve
80 L/min

345



SN6 Sectional Valve
140 L/min

347



SN8 Sectional Valve
220 L/min

349



Cable Control

351



Hydraulic Pilot
Controllers

351

SECTIONAL VALVES

SN3 (50 LPM)

**TECH
DATA**

SN3 Sectional Valve

Relief valve standard range 63-200 bar, standard setting 120 bar | Port cavities in all sections | Series sections available max 210 bar





Part #	List Price \$	Qty	Spool	Max Flow (L/min)	Max Pressure (bar)		Ports (BSPP)		Dimension (mm)	
					P	T	T-C	P-A-B	X	Y
SN3/1S3/18L/P3T/G3-4-M3	794.00	1	Cylinder	50	315	25	1/2"	3/8"	118.5	58
SN3/2S3/18L/P3T/G3-4-M3	1149.00	2	Cylinder	50	315	25	1/2"	3/8"	156.5	96
SN3/3S3/18L/P3T/G3-4-M3	1503.00	3	Cylinder	50	315	25	1/2"	3/8"	194.5	134
SN3/4S3/18L/P3T/G3-4-M3	1852.00	4	Cylinder	50	315	25	1/2"	3/8"	232.5	172
SN3/5S3/18L/P3T/G3-4-M3	2209.00	5	Cylinder	50	315	25	1/2"	3/8"	270.5	210
SN3/6S3/18L/P3T/G3-4-M3	2563.00	6	Cylinder	50	315	25	1/2"	3/8"	308.5	248
SN3/7S3/18L/P3T/G3-4-M3	2915.00	7	Cylinder	50	315	25	1/2"	3/8"	346.5	286
SN3/8S3/18L/P3T/G3-4-M3	3265.00	8	Cylinder	50	315	25	1/2"	3/8"	384.5	324
SN3/9S3/18L/P3T/G3-4-M3	3615.00	9	Cylinder	50	315	25	1/2"	3/8"	422.5	362
SN3/10S3/18L/P3T/G3-4-M3	3968.00	10	Cylinder	50	315	25	1/2"	3/8"	460.5	400
SN3/11S3/18L/P3T/G3-4-M3	4321.00	11	Cylinder	50	315	25	1/2"	3/8"	498.5	438
SN3/12S3/18L/P3T/G3-4-M3	4668.00	12	Cylinder	50	315	25	1/2"	3/8"	536.5	476

SN3 Seal Kits & Replacement Handles

Part #	List Price \$	Description
FPSN-3-SK	14.00	Inlet relief seal
EWSN-3-SK	66.00	Working section seal kit
FTSN-3-SK	14.00	Outlet section seal kit
YLWSN33080-SK	79.00	SN3 pneumatic actuator seal kit
YLWSN08160	19.00	SN3 handle



**Cable Control
on page 351**

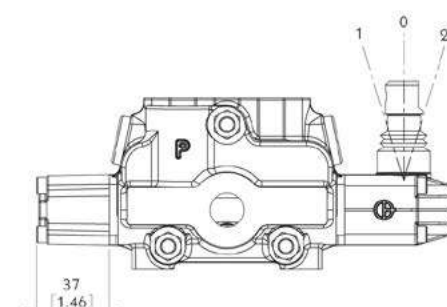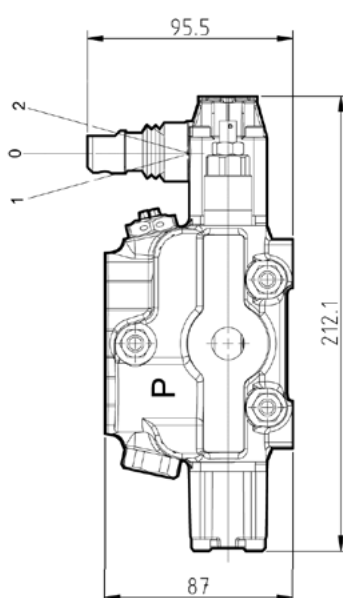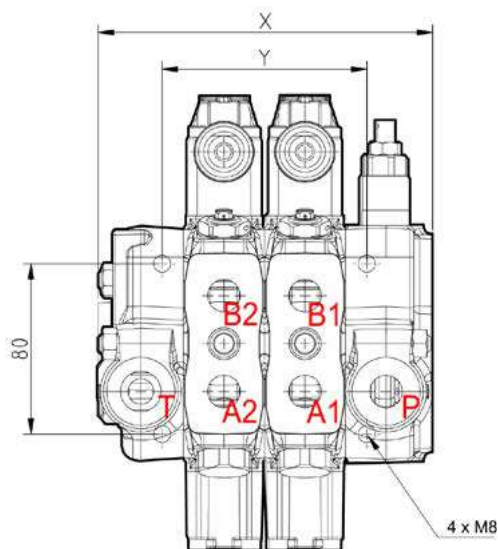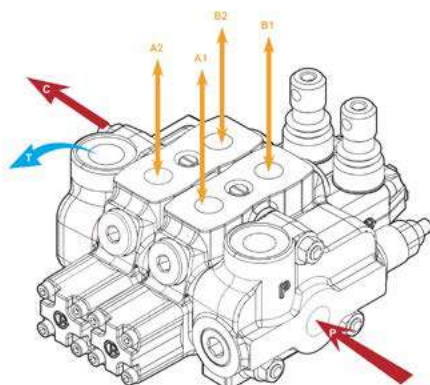


SERIES	SECTIONS	INLET RELIEF		SPOOL	B-SIDE	A-SIDE	PORT RELIEF		SPOOL	B-SIDE	A-SIDE		PORTS		OUTLET
SN3/	2S	3	/	1	8	L	PG2	/	2	6-1	L	/	G-3-4	-	M3

SECTIONS	List Price \$
1S	1 working section 794.00
2S	2 working sections 1149.00
3S	3 working sections 1503.00
4S	4 working sections 1852.00
5S	5 working sections 2209.00
6S	6 working sections 2563.00
7S	7 working sections 2915.00
8S	8 working sections 3265.00
9S	9 working sections 3615.00
10S	10 working sections 3968.00
11S	11 working sections 4321.00
12S	12 working sections 4668.00

- Spool sequence starts from the spool closest to the relief valve.

- Spool option B-side and A-side must be repeated for each spool section unless the configuration is common throughout the valve.

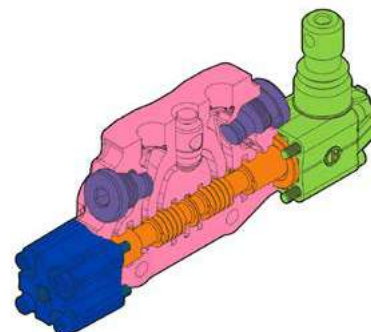

INLET PRESSURE RELIEF VALVE				List Price \$
3	YLPSN33003	Range 63 to 200 bar, standard setting 120 bar	STANDARD	160.00
4	YLPSN33004	Range 160 to 315 bar, standard setting 220 bar		160.00
SV	YLPSN34000	Relief valve blanking plug		47.00
XYG	YLPSN33000	Pilot operated pressure relief valve, range 25 to 315 bar, standard setting 125 bar		387.00

SPOOL OPTIONS				List Price \$
1	YLWSN32001	Double acting, 3 positions, A+B closed in neutral position	STANDARD	102.00
1S	-	Double acting, 3 positions, A+B closed in neutral position, for series circuit		794.00
2S	-	Double acting, 3 positions, A+B open to tank in neutral position, for series circuit		1149.00
2	YLWSN32002	Double acting, 3 positions, A+B open to tank in neutral position	STANDARD	102.00
3	YLWSN32003	Single acting on A closed in neutral position, 3 positions, B plugged		114.00
4	YLWSN32004	Single acting on B closed in neutral position, 3 positions, A plugged		114.00

B-SIDE SPOOL POSITIONER				List Price \$
6-1	YLWSN33061	Detent in position 1-0-2, without spring centered		72.00
6-2	YLWSN33062	2 positions, detent in position 0-2, without spring centered		72.00
8	YLWSN33008	Spring return to neutral position	STANDARD	54.00
9-1	YLWSN33091	Detent in position 1, 2 with spring centered		84.00
9-2	YLWSN33092	Detent in position 2 with spring centered		93.00
9-3	YLWSN33093	Detent in position 1 with spring centered		93.00
8EP3A	YLWSN34300-12V	ON/OFF electro-pneumatic actuator 12v DC		570.00
8EP3B	YLWSN34300-24V	ON/OFF electro-pneumatic actuator 24v DC		579.00
8P	YLWSN33080	ON/OFF pneumatic actuator		303.00
8MG3	YLWSN34803	Microswitch kit operated in position 1 & 2 (normally open)		249.00
8IM	YLWSN330810	Hydraulic pilot kit - SN3 - pilot pressure max 50 bar		75.00

A-SIDE OPTIONS				List Price \$
L	YLWSN34000	Standard lever	STANDARD	43.00
LCB	YLWSN34002	Joystick lever for 2 section operation		252.00

PORT RELIEF (Optional)				List Price \$
PG2	YLWSN35002	Anti-shock valve, range 63 to 125 bar		134.00
PG3	YLWSN35003	Anti-shock valve, range 100 to 250 bar		134.00
PG4	YLWSN35004	Anti-shock valve, range 200 to 315 bar		134.00
UG2	YLWSN35012	Anti-shock valve and anti-cavitation valve, range 63 to 125 bar		148.00
UG3	YLWSN35013	Anti-shock valve and anti-cavitation valve, range 100 to 250 bar		148.00
UG4	YLWSN35014	Anti-shock valve and anti-cavitation valve, range 200 to 315 bar		148.00

PORTS		List Price \$
G-3	3/8" BSP ports	-
G-4	1/2" BSP ports	-

OUTLET COVER		List Price \$
M3	Open centre	STANDARD -
M8	Closed centre (power beyond conversion plug)	-

SECTIONAL VALVES

SN4 (80 LPM)

**TECH
DATA**

SN4 Sectional Valve

Relief valve standard range 125-250 bar, standard setting 120 bar





Part #	List Price \$	Qty	Spool	Max Flow (L/min)	Max Pressure (bar)		Ports (BSPP)		Dimension (mm)	
					P	T	T-C	P-A-B	X	Y
SN4/1S3/18L/P3T/G4-6-M3	1056.00	1	Cylinder	80	315	25	3/4"	1/2"	128	82
SN4/2S3/18L/P3T/G4-6-M3	1149.00	2	Cylinder	80	315	25	3/4"	1/2"	169	123
SN4/3S3/18L/P3T/G4-6-M3	1503.00	3	Cylinder	80	315	25	3/4"	1/2"	210	164
SN4/4S3/18L/P3T/G4-6-M3	2479.00	4	Cylinder	80	315	25	3/4"	1/2"	251	205
SN4/5S3/18L/P3T/G4-6-M3	2953.00	5	Cylinder	80	315	25	3/4"	1/2"	292	246
SN4/6S3/18L/P3T/G4-6-M3	3428.00	6	Cylinder	80	315	25	3/4"	1/2"	333	267
SN4/7S3/18L/P3T/G4-6-M3	3899.00	7	Cylinder	80	315	25	3/4"	1/2"	374	328
SN4/8S3/18L/P3T/G4-6-M3	4371.00	8	Cylinder	80	315	25	3/4"	1/2"	415	369
SN4/9S3/18L/P3T/G4-6-M3	4844.00	9	Cylinder	80	315	25	3/4"	1/2"	456	410
SN4/10S3/18L/P3T/G4-6-M3	5318.00	10	Cylinder	80	315	25	3/4"	1/2"	497	451
SN4/11S3/18L/P3T/G4-6-M3	5793.00	11	Cylinder	80	315	25	3/4"	1/2"	538	492
SN4/12S3/18L/P3T/G4-6-M3	6266.00	12	Cylinder	80	315	25	3/4"	1/2"	579	533

SN4 Seal Kits & Replacement Handles

Part #	List Price \$	Description
FPSN-4-SK	14.00	Inlet relief seal
EWSN-4-SK	66.00	Working section seal kit
FTSN-4-SK	14.00	Outlet section seal kit
YLWSN43080-SK	69.00	SN4 pneumatic actuator seal kit
YLWSN10200	36.00	SN4 handle



**Cable Control
on page 351**

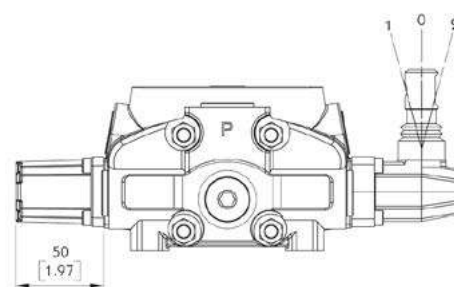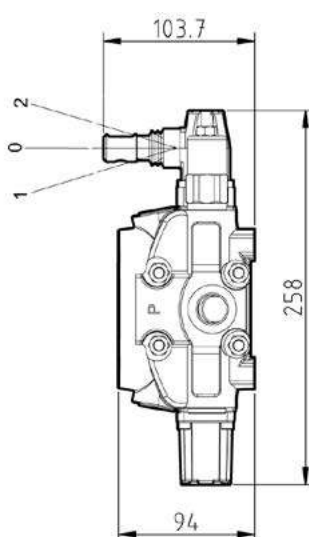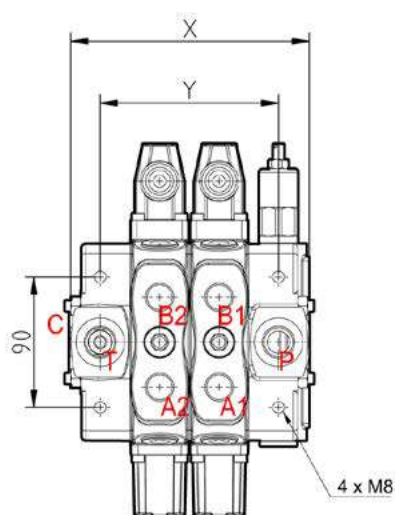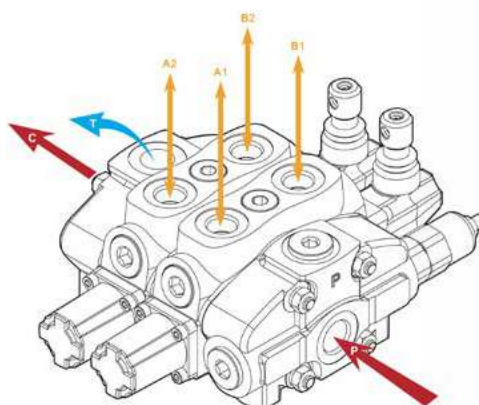


SERIES	SECTIONS	INLET RELIEF		SPOOL	B-SIDE	A-SIDE	PORT RELIEF		SPOOL	B-SIDE	A-SIDE		PORTS		OUTLET
SN4/	2S	3	/	1	8	L	PG2	/	2	6-1	L	/	G-4-6	-	M3

SECTIONS	List Price \$
1S	1 working section 1056.00
2S	2 working sections 1149.00
3S	3 working sections 1503.00
4S	4 working sections 2479.00
5S	5 working sections 2953.00
6S	6 working sections 3428.00
7S	7 working sections 3899.00
8S	8 working sections 4371.00
9S	9 working sections 4844.00
10S	10 working sections 5318.00
11S	11 working sections 5793.00
12S	12 working sections 6266.00

- Spool sequence starts from the spool closest to the relief valve.

- Spool option B-side and A-side must be repeated for each spool section unless the configuration is common throughout the valve.

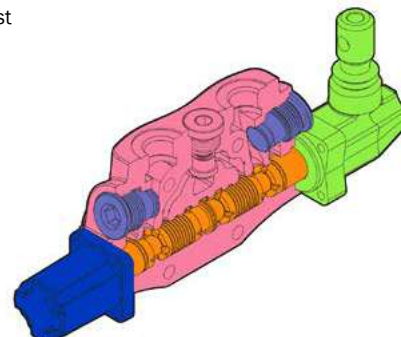

INLET PRESSURE RELIEF VALVE			List Price \$
3	YLPSN43003	Range 125 to 250 bar, standard setting 175 bar	214.00
4	YLPSN43004	Range 200 to 315 bar, standard setting 220 bar	214.00
SV	YLPSN44000	Relief valve blanking plug	50.00
XSG	Y LX21000	Pilot operated pressure relief valve, range 25 to 315 bar, standard setting 125 bar	STANDARD 309.00

SPOOL OPTIONS			List Price \$
1	YLWSN42001	Double acting, 3 positions, A+B closed in neutral position	STANDARD 202.00
2	YLWSN42002	Double acting, 3 positions, A+B open to tank in neutral position	STANDARD 202.00
3	YLWSN42003	Single acting on A closed in neutral position, 3 positions, B plugged	214.00
1KOL	EWSN-4/1KOL/G-4	SN4 pressure kickout working section	892.00

B-SIDE SPOOL POSITIONER			List Price \$
6-1	YLWSN43061	Detent in position 1-0-2, without spring centered	109.00
8	YLWSN43008	Spring return to neutral position	STANDARD 97.00
9-1	YLWSN43091	Detent in position 1, 2 with spring centered	219.00
9-2	YLWSN43092	Detent in position 2 with spring centered	232.00
9-3	YLWSN43093	Detent in position 1 with spring centered	232.00
8EP3A	YLWSN44300-12V	ON/OFF electro-pneumatic actuator 12v DC	576.00
8EP3B	YLWSN44300-24V	ON/OFF electro-pneumatic actuator 24v DC	576.00
8P	YLWSN43080	ON/OFF pneumatic actuator	309.00
8MG3	YLWSN43803	Microswitch kit operated in position 1 & 2 (normally open)	259.00
8IM	YLWSN430810	Hydraulic pilot with single spring, exclusive for standard spool (type 1+2)	160.00
8D2	YLWSN43082	Spring return to neutral position, pin with M8 thread for dual control	70.00

A-SIDE OPTIONS			List Price \$
L	YLWSN44000	Standard lever	STANDARD 73.00
LCB	YLWSN44002	Joystick lever for 2 section operation	266.00

PORT RELIEF (Optional)			List Price \$
PG2	YLWSN45002	Anti-shock valve, range 63 to 125 bar	165.00
PG3	YLWSN45003	Anti-shock valve, range 100 to 250 bar	165.00
PG4	YLWSN45004	Anti-shock valve, range 200 to 315 bar	165.00
UG2	YLWSN45012	Anti-shock valve and anti-cavitation valve, range 63 to 125 bar	181.00
UG3	YLWSN45013	Anti-shock valve and anti-cavitation valve, range 100 to 250 bar	181.00
UG4	YLWSN45014	Anti-shock valve and anti-cavitation valve, range 200 to 315 bar	181.00
C	YLWSN45100	Anti-cavitation valve	170.00

PORTS		List Price \$
G-4	1/2" BSP ports	-
G-6	3/4" BSP ports	-

OUTLET COVER		List Price \$
M3	Open centre	STANDARD -
M8	Closed centre (power beyond conversion plug)	-

SECTIONAL VALVES

SN6 (140 LPM)

TECH
DATA

SN6 Sectional Valve

Relief valve standard range 25-315 bar, standard setting 120 bar | Port cavities in all sections





Part #	List Price \$	Qty	Spool	Max Flow (L/min)	Max Pressure (bar)		Ports (BSPP)		Dimension (mm)	
					P	T	T	P-A-B-C	X	Y
SN6/1S3/18L/P3T/G6-1-M3	1517.00	1	Cylinder	140	315	25	1"	3/4"	176	124
SN6/2S3/18L/P3T/G6-1-M3	2283.00	2	Cylinder	140	315	25	1"	3/4"	224	172
SN6/3S3/18L/P3T/G6-1-M3	3051.00	3	Cylinder	140	315	25	1"	3/4"	272	220
SN6/4S3/18L/P3T/G6-1-M3	3819.00	4	Cylinder	140	315	25	1"	3/4"	320	268
SN6/5S3/18L/P3T/G6-1-M3	4591.00	5	Cylinder	140	315	25	1"	3/4"	368	316
SN6/6S3/18L/P3T/G6-1-M3	5358.00	6	Cylinder	140	315	25	1"	3/4"	416	364
SN6/7S3/18L/P3T/G6-1-M3	6126.00	7	Cylinder	140	315	25	1"	3/4"	464	412
SN6/8S3/18L/P3T/G6-1-M3	6896.00	8	Cylinder	140	315	25	1"	3/4"	512	460
SN6/9S3/18L/P3T/G6-1-M3	7665.00	9	Cylinder	140	315	25	1"	3/4"	560	508
SN6/10S3/18L/P3T/G6-1-M3	8433.00	10	Cylinder	140	315	25	1"	3/4"	608	556
SN6/11S3/18L/P3T/G6-1-M3	9200.00	11	Cylinder	140	315	25	1"	3/4"	656	604
SN6/12S3/18L/P3T/G6-1-M3	9971.00	12	Cylinder	140	315	25	1"	3/4"	704	652

SN6 Seal Kits & Replacement Handles

Part #	List Price \$	Description
FPSN-6-SK	17.00	Inlet relief seal
EWSN-6-SK	71.00	Working section seal kit
FTSN-6-SK	17.00	Outlet section seal kit
YLWSN63080-SK	71.00	SN6 pneumatic actuator kit
YLWSN10200	36.00	SN6 handle



Cable Control
on page 351

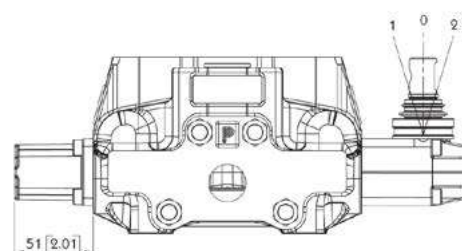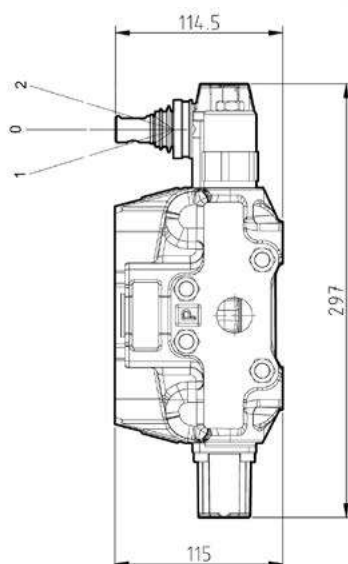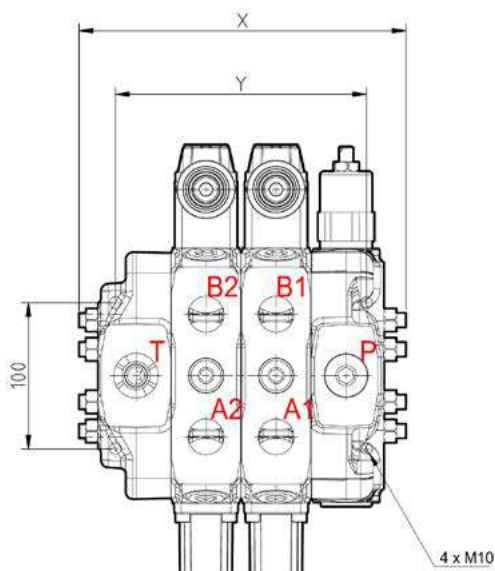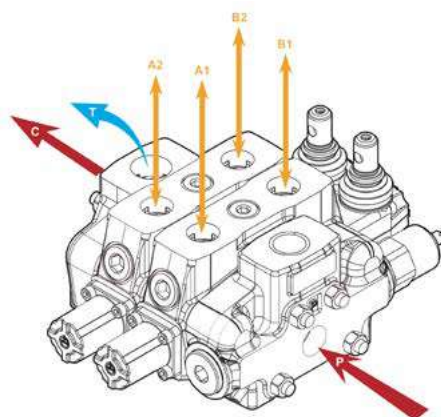


SERIES	SECTIONS	INLET RELIEF		SPOOL	B-SIDE	A-SIDE	PORT RELIEF		SPOOL	B-SIDE	A-SIDE		PORTS		OUTLET
SN6/	2S	3	/	1	8	L	PG2	/	2	6-1	L	/	G-6-1	-	M3

SECTIONS	List Price \$
1S	1 working section 1517.00
2S	2 working sections 2283.00
3S	3 working sections 3051.00
4S	4 working sections 3819.00
5S	5 working sections 4591.00
6S	6 working sections 5358.00
7S	7 working sections 6126.00
8S	8 working sections 6896.00
9S	9 working sections 7665.00
10S	10 working sections 8433.00
11S	11 working sections 9200.00
12S	12 working sections 9971.00

- Spool sequence starts from the spool closest to the relief valve.

- Spool option B-side and A-side must be repeated for each spool section unless the configuration is common throughout the valve.

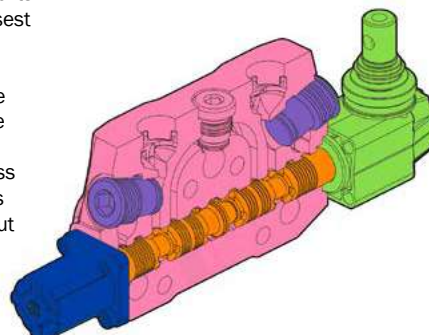

INLET PRESSURE RELIEF VALVE				List Price \$
3	YLPSN63003	Range 125 to 250 bar, standard setting 175 bar		268.00
SV	YLPSN64000	Relief valve blanking plug		49.00
XFG	YLPSN63000	Pilot operated pressure relief valve, range 25 to 315 bar, standard setting 125 bar	STANDARD	317.00

SPOOL OPTIONS				List Price \$
1	YLWSN62001	Double acting, 3 positions, A+B closed in neutral position	STANDARD	185.00
2	YLWSN62002	Double acting, 3 positions, A+B open to tank in neutral position	STANDARD	185.00
3	YLWSN62003	Single acting on A closed in neutral position, 3 positions, B plugged		196.00

B-SIDE SPOOL POSITIONER				List Price \$
6-1	YLWSN63061	Detent in position 1-0-2, without spring centered		148.00
8	YLWSN63008	Spring return to neutral position	STANDARD	107.00
9-1	YLWSN63091	Detent in position 1, 2 with spring centered		278.00
9-2	YLWSN63092	Detent in position 2 with spring centered		232.00
9-3	YLWSN63093	Detent in position 1 with spring centered		232.00
8EP3A	YLWSN64300-12V	ON/OFF electro-pneumatic actuator 12v DC		572.00
8EP3B	YLWSN64300-24V	ON/OFF electro-pneumatic actuator 24v DC		572.00
8P	YLWSN63080	ON/OFF pneumatic actuator		304.00
8MG3	YLWSN63803	Microswitch kit operated in position 1 & 2 (normally open)		259.00
8IM	YLWSN630810	Hydraulic pilot kit, pilot pressure maximum 50 bar		160.00

A-SIDE OPTIONS				List Price \$
L	YLWSN64000	Standard lever	STANDARD	47.00
LCB	YLWSN64002	Joystick lever for 2 section operation		269.00

PORT RELIEF (Optional)				List Price \$
PG2	YLWSN65002	Anti-shock valve, range 63 to 125 bar		259.00
PG3	YLWSN65003	Anti-shock valve, range 100 to 250 bar		259.00
PG4	YLWSN65004	Anti-shock valve, range 200 to 315 bar		259.00
UG2	YLWSN65012	Anti-shock valve and anti-cavitation valve, range 63 to 125 bar		325.00
UG3	YLWSN65013	Anti-shock valve and anti-cavitation valve, range 100 to 250 bar		325.00
UG4	YLWSN65014	Anti-shock valve and anti-cavitation valve, range 200 to 315 bar		325.00
C	YLWSN65100	Anti-cavitation valve		246.00

PORTS		List Price \$
G-6	3/4" BSP ports	-
G-1	1" BSP ports	-

OUTLET COVER		List Price \$
M3	Open centre	STANDARD -
M8	Closed centre (power beyond conversion plug)	-

SECTIONAL VALVES

SN8 (240 LPM)

**TECH
DATA**

SN8 Sectional Valve

Relief valve standard range 25-315 bar, standard setting 125 bar | Port cavities in all sections





Part #	List Price \$	Qty	Spool	Max Flow (L/min)	Max Pressure (bar)		Ports (BSPP)		Dimension (mm)	
					P	T	T	P-A-B-C	X	Y
SN8/1S3/18L/P3T/G8-8-10-M3	2692.00	1	Cylinder	240	315	25	1.1/4"	1"	235	162
SN8/2S3/18L/P3T/G8-8-10-M3	3913.00	2	Cylinder	240	315	25	1.1/4"	1"	297	224
SN8/3S3/18L/P3T/G8-8-10-M3	5130.00	3	Cylinder	240	315	25	1.1/4"	1"	359	286
SN8/4S3/18L/P3T/G8-8-10-M3	6354.00	4	Cylinder	240	315	25	1.1/4"	1"	421	348
SN8/5S3/18L/P3T/G8-8-10-M3	7572.00	5	Cylinder	240	315	25	1.1/4"	1"	483	410
SN8/6S3/18L/P3T/G8-8-10-M3	8794.00	6	Cylinder	240	315	25	1.1/4"	1"	545	472
SN8/7S3/18L/P3T/G8-8-10-M3	10008.00	7	Cylinder	240	315	25	1.1/4"	1"	607	534
SN8/8S3/18L/P3T/G8-8-10-M3	11232.00	8	Cylinder	240	315	25	1.1/4"	1"	669	596
SN8/9S3/18L/P3T/G8-8-10-M3	12454.00	9	Cylinder	240	315	25	1.1/4"	1"	731	658
SN8/10S3/18L/P3T/G8-8-10-M3	13672.00	10	Cylinder	240	315	25	1.1/4"	1"	793	720
SN8/11S3/18L/P3T/G8-8-10-M3	14893.00	11	Cylinder	240	315	25	1.1/4"	1"	855	782
SN8/12S3/18L/P3T/G8-8-10-M3	16111.00	12	Cylinder	240	315	25	1.1/4"	1"	917	844

SN8 Seal Kits & Replacement Handles

Part #	List Price \$	Description
FPSN-8-SK	24.00	Inlet relief seal
EWSN-8-SK	91.00	Working section seal kit
FTSN-8-SK	26.00	Outlet section seal kit
YLWSN83080-SK	130.00	SN8 pneumatic actuator seal kit
YLWSN12200	40.00	SN8 handle



**Cable Control
on page 351**

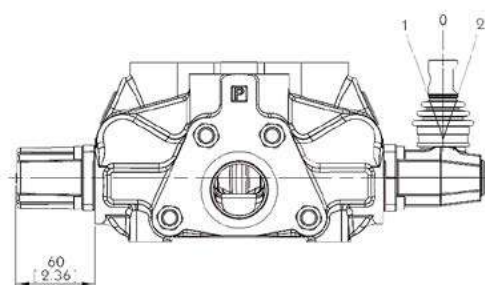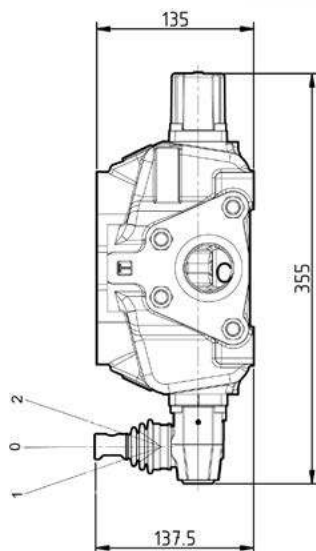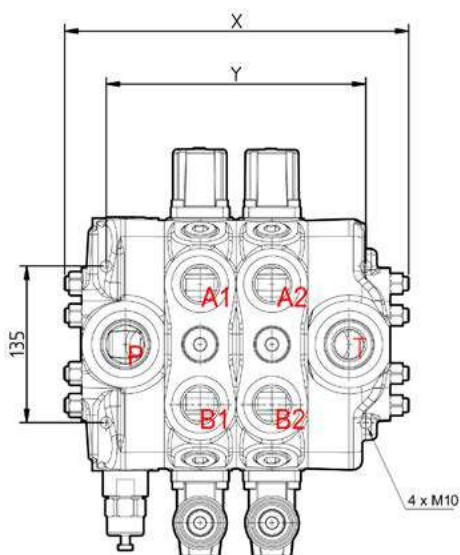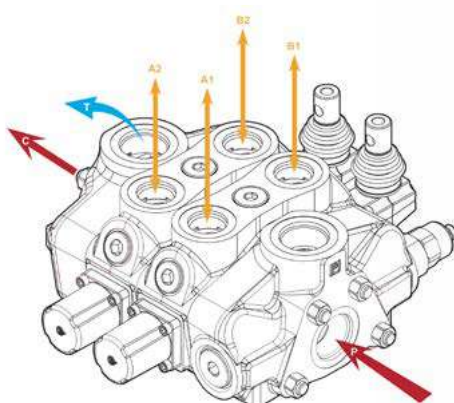


SERIES	SECTIONS	INLET RELIEF		SPOOL	B-SIDE	A-SIDE	PORT RELIEF		SPOOL	B-SIDE	A-SIDE		PORTS		OUTLET
SN8/	2S	3	/	1	8	L	PG2	/	2	6-1	L	/	G-8-10	-	M3

SECTIONS		List Price \$
1S	1 working section	2692.00
2S	2 working sections	3913.00
3S	3 working sections	5130.00
4S	4 working sections	6354.00
5S	5 working sections	7572.00
6S	6 working sections	8794.00
7S	7 working sections	10008.00
8S	8 working sections	11232.00
9S	9 working sections	12454.00
10S	10 working sections	13672.00
11S	11 working sections	14893.00
12S	12 working sections	16111.00

- Spool sequence starts from the spool closest to the relief valve.

- Spool option B-side and A-side must be repeated for each spool section unless the configuration is common throughout the valve.

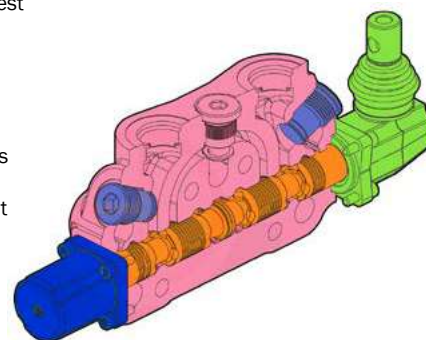

INLET PRESSURE RELIEF VALVE				List Price \$
XHG	YLPSN83000	Pilot operated pressure relief valve, range 25 to 315 bar, standard setting 125 bar	STANDARD	514.00
SV	YLPSN64000	Relief valve blanking plug		49.00

SPOOL OPTIONS				List Price \$
1	YLWSN82001	Double acting, 3 positions, A+B closed in neutral position	STANDARD	329.00
2	YLWSN82002	Double acting, 3 positions, A+B open to tank in neutral position	STANDARD	329.00
3	YLWSN82003	Single acting on A closed in neutral position, 3 positions, B plugged		370.00
4	YLWSN82004	Single acting on B closed in neutral position, 3 positions, A plugged		366.00

B-SIDE SPOOL POSITIONER				List Price \$
6-1	YLWSN83061	Detent in position 1-0-2, without spring centered		164.00
6-3	YLWSN83063	2 positions, detent in position 1-0, without spring centered		164.00
8	YLWSN83008	Spring return to neutral position	STANDARD	128.00
9-1	YLWSN83091	Detent in position 1, 2 with spring centered		349.00
9-2	YLWSN83092	Detent in position 2 with spring centered		354.00
8P	YLWSN83080	ON/OFF pneumatic actuator		411.00
8EP3A	YLWSN84300-12V	ON/OFF electro-pneumatic actuator 12v DC		678.00
8EP3B	YLWSN84300-24V	ON/OFF electro-pneumatic actuator 24v DC		678.00
8IM	YLWSN830810	Hydraulic pilot kit, 181mm, cylinder spool		616.00
8IM	YLWSN830811	Hydraulic pilot kit, 281mm, motor spool		616.00

A-SIDE OPTION				List Price \$
L	YLWSN84000	Standard lever	STANDARD	186.00

PORT RELIEF (Optional)				List Price \$
XU2	YLWSN85012	Anti-shock valve and anti-cavitation valve, range 63 to 125 bar		402.00
XU3	YLWSN85013	Anti-shock valve and anti-cavitation valve, range 100 to 250 bar		402.00
XU4	YLWSN85014	Anti-shock valve and anti-cavitation valve, range 200 to 315 bar		402.00

PORTS		List Price \$
G-8	1" BSP ports	-
G-10	1.1/4" BSP ports	-


OUTLET COVER		List Price \$
M3	Open centre	STANDARD -
M8	Closed centre (power beyond conversion plug)	-

TECH DATA

Cable Control

Part #	List Price \$	Description
RCC-3/1S/HL	285.00	Remote lever for cable control SN3 (requires 1 x TQ cable connector & 1 x cable)
RCC-5/1S/HL	326.00	Remote lever for cable control SN4, SN6, SN8 (requires 1 x TQ cable connector & 1 x cable)
FCR-2	500.00	Joystick for cable control, dual axis (requires 2 x TQ cable connector & 2 x cable)
YLWSN34004	173.00	TQ cable connector, spool to joystick cable, SN3
YLWSN44003	116.00	TQ cable connector, spool to joystick cable, SN4
YLWSN64003	168.00	TQ cable connector, spool to joystick cable, SN6
YLWSN84003	259.00	TQ cable connector, spool to joystick cable, SN8
YLMBCABLE1M	232.00	Cable 1 metre
YLMBCABLE1.5M	238.00	Cable 1.5 metre
YLMBCABLE2M	252.00	Cable 2 metre
YLMBCABLE2.5M	268.00	Cable 2.5 metre
YLMBCABLE3M	281.00	Cable 3 metre

✂ RCC lever controllers can be bolted together when used on multiple spools

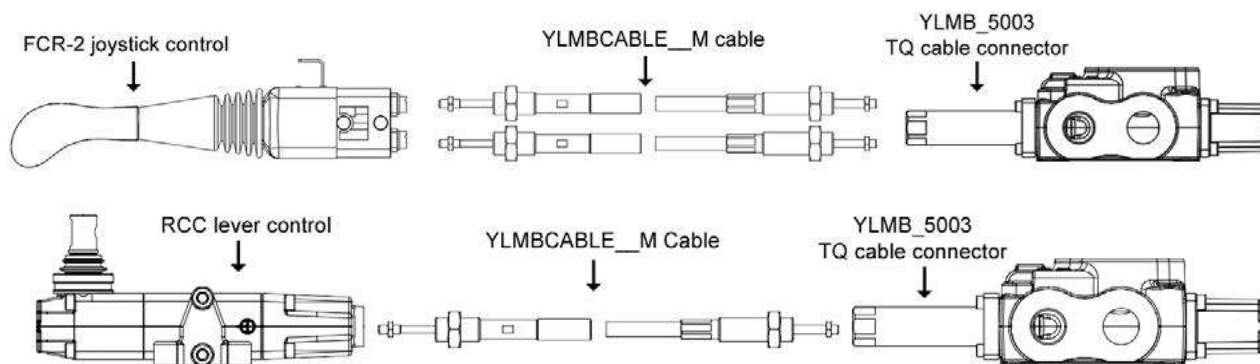

TECH DATA

Hydraulic Pilot Controllers

Part #	List Price \$	Description	Axis	Flow	Inlet Pressure Range	A+B Outlet Pressure Range	Max Back Pressure
JHP-1/1S-G2/8-A01B	517.00	Spring centre	Single	5-20 L/min	30-100 bar	5-19 bar	3 bar
JHP-1/1S-G2/9-1-A01B	613.00	Spring centre detent in pos.1+2	Single	5-20 L/min	30-100 bar	5-19 bar	3 bar
JHP-1/1S-G2/FD-A01B	605.00	Friction detent	Single	5-20 L/min	30-100 bar	5-19 bar	3 bar
JHP-1/1S-G2/LES-A01B	647.00	Safety lever detent in neutral	Single	5-20 L/min	30-100 bar	5-19 bar	3 bar
JHP-2/01-G2/01-LCB-B02B	1202.00	Spring centre	Dual	5-20 L/min	30-100 bar	6-25 bar	3 bar
PHP-1/02-G2/8-A05B	1483.00	Spring centre	Single	5-20 L/min	30-100 bar	2-20.5 bar	3 bar
PHP-1/02-G2/8-A02B	1483.00	Spring centre	Single	5-20 L/min	30-100 bar	6-25 bar	3 bar

✂ All hydraulic pilot controllers are suitable for use with sectional, proportional and monoblock valves.

✂ JHP pilot controllers can be bolted together when used on multiple spools.

